



**YANMAR**

# **COMPACT TRACTORS**

## **22-60HP**





# For all seasons, and all reasons

With a comprehensive range covering the 22 to 60 HP class, Yanmar has a tractor to suit your industry, your application, and your budget.

- Purpose-built for European customers
- Building on more than a century of innovation and excellence

## A history of innovation

**More than 100 years of Japanese innovation and excellence and some 50 years of European experience combines to provide a tractor range that is purpose-built for European customers.**

The quality built into every Yanmar compact utility tractor is a reflection of the company's heritage.

Built in Japan to meet the specific needs and demands of European customers, these tractors are the

culmination of a continuous design and development process that is never satisfied and that is constantly evolving and improving.

These machines feature advanced systems and yet are easy to operate. They are quiet and clean-running, yet powerful and productive. And they set new standards whilst drawing inspiration from the company's proud past.

### ***"When only the best will do."***

"It's all about trust. The landscapers and municipalities who are my professional customers want their tractors to complete the job. Always and under all circumstances. That is what YANMAR tractors do. They keep the promise."



Mr. Karsten Kreibohm, owner of Kreibohm Kommunaltechnik, Alferde, Lower Saxony, Germany



# YANMAR Tractor power range

R = ROPS  
Q = CABIN



SA222-R  
SA222-Q



YT235-R  
YT235-Q



YT347-R  
YT347-Q



YT359-R  
YT359-Q

**22<sub>HP</sub>**

**26<sub>HP</sub>**

**35<sub>HP</sub>**

**47<sub>HP</sub>**

**60<sub>HP</sub>**

SA326-R  
SA326-Q

SA426-R  
SA426-Q



YM347-R

YM359-R







# When the going gets tough...

With their compact dimensions, comfortable cab and intuitive operation, Yanmar's range of compact utility tractors are suitable for a huge range of industries, applications and terrains.



Exceptional ground clearance provides a smooth ride in all terrains.



## Specifications

Model	SA222 (Cabin & ROPS)	SA326 (Cabin & ROPS)	SA426 (Cabin & ROPS)
Engine power (hp)	22	26	26
Transmission type	Two pedal hydrostatic transmission		
Max. speed (km/h)	13	23	23
Lifting capacity (kg)	510	713	713
Turning circle (inner radius)	2,4 m	2,6 m	2,6 m

## SA Series

SA222-R/SA222-Q  
SA326-R/SA326-Q  
SA426-R/SA426-Q



**ROPS**  
Provides excellent protection together with a low-profile for transportation.

**Compact body**  
Designed to go anywhere and to operate where space is at a premium.

**Spacious cab**  
Providing the ideal combination of operator comfort and operator protection.



**Versatile category 3-point hitch**  
The machine is equipped with a Category I 3-point hitch as standard, and is offered with a wide array of attachments for maximum operating versatility and optimum utilisation levels.

**Class leading fuel economy**  
Advanced engine and transmission technology combines to reduce fuel consumption and lower operating costs.



# Expect more. Get More. YT2 tractor delivers.



1.350 mm  
3.063 mm  
2.060 mm  
Width and height may vary, based on tire type

YT2 tractors were designed and developed to be a “pleasure to own”. And that is precisely what Yanmar has achieved.



**Common rail STAGE V engine**  
Satisfies all current emissions regulations and is ready for EU Stage V standards.

**HTS operation variable to max. speed of 31 km/h**  
Smooth speed and directional changes, easy switching between 2WD and 4WD, and an impressive top speed of 31 km/h.

**Intuitive operation**  
Ergonomic controls are within easy reach and are intuitive to operate, allowing the driver to remain relaxed while working.

**6000h DPF maintenance interval - the entire lifetime of the tractor**  
Automatically-regenerating diesel particulate filter reduces exhaust emissions for clean running and extended service life.

**Drive over the mid-mower**  
Mid-mounted mower provides optimum combination of power, performance and operator visibility for increased production and safety.



## Specifications

Model	YT235 (Cabin & ROPS)
Engine power (hp)	35
Transmission type	Two pedal hydrostatic transmission
Max. speed (km/h)	31
Lifting capacity (kg)	1.300
Turning circle (inner radius)	2.9 m

Customer needs and expectations lie at the very heart of the design of the new YT2 Series





Giving farmers control,  
whether they're on  
the tractor or off it!

YM3 Series

YM347-R

YM359-R

Built today for the  
challenges of the future

Engine

Powerful and field proven Yanmar direct-injection TNV common rail engine utilises electronics to optimise combustion by electronically controlling fuel injection for reduced fuel consumption and lower running costs.



Transmission

Fully-synchronised 12 x 12 transmission provides smooth speed shifting throughout the range. Two or four-wheel drive is selected using a simple lever.

Simple to operate yet covered by state-of-the-art telematics, YM3 tractors combine tradition with technology to satisfy customer needs.



Compact Dimensions

Width of just 1,42 m with narrow tyre option and foldable ROPS protection provides go-anywhere, operate-anywhere flexibility.

Specifications

Model	YM347 (ROPS)	YM359 (ROPS)
Engine power (hp)	47	60
Transmission type	Mechanical full synchronized	
Max. speed (km/h)	25,9	
Lifting capacity (kg)	1.450	1.430
Turning circle (inner radius)	4.7 m	





YT3 Series

YT347-R/YT347-Q  
YT359-R/YT359-Q

Highly efficient variable transmission  
i-HMT (integrated Hydro-Mechanical  
Transmission)

i-HMT achieves smooth and step-less  
gear shifting from zero to maximum  
speed. Optimum speeds that were not  
previously available with existing  
equipment are now selectable at will to  
match specific duties and applications.



Fully flat deck


Unevenness is eradicated from the  
floor to create a level surface free  
from trip hazards for enhanced safety  
and comfort.



Full LCD display with Electronic  
controls

Instrumentation panel displays a  
reminder for key operations and  
maintenance intervals.


Vibration absorbing frame structure  
Frame structure suppresses both noise  
and vibration to provide operator with  
ideal working environment and noise  
levels of just 77 dB(A).

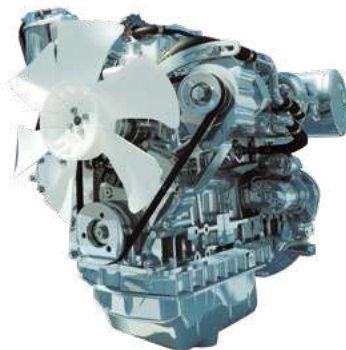

Only 77dB

High power common rail engine

Class-leading levels of power and  
productivity balanced by environmental  
credentials that are unmatched in this  
tractor weight class.

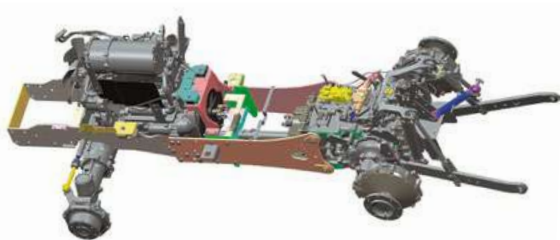

Specifications

Model	YT347 (Cabin & ROPS)	YT359 (Cabin & ROPS)
Engine power (hp)	47	60
Transmission type	i-HMT	
Max. speed (km/h)	31	
Lifting capacity (kg)	1.660	
Turning circle (inner radius)	2,9 m	



Power to perform

The first tractor with i-HMT transmission under 50HP sets  
a new standard in the compact utility tractor sector.



47-60 HP

YT3 Series





# Yanmar Genuine Parts

Yanmar's genuine parts are built, tested and produced to provide optimum safety and quality. By using genuine Yanmar spare parts, the performance, durability and resale value of your machine is assured.

## Fast delivery of European parts distribution

The purpose-built Yanmar European bonded-goods central warehouse in The Netherlands dispatches stock items across Europe. The warehouse operates with a highly efficient, computer-controlled system that is fully integrated with Yanmar's (in-house designed) Parts Management System.

# Yanmar 5 Year Warranty



Don't settle for standard. Yanmar tractors are designed from the ground up and backed by 110+ years of experience. This exceptional quality gives Yanmar the confidence to offer not 2, 3 or 4 but a 5-year or 5,000-hour warranty.

Yanmar Europe's unique in-house designed warranty ensures that any issue, normally covered by Yanmar's standard 2-year warranty, is covered by 5 years or 5,000 hours, whichever comes first.

## What's included?

- ✓ Exterior, Cabin and ROPS
- ✓ Common rail diesel engine aftertreatment system
- ✓ Hydraulics system
- ✓ Engine parts with a 2-year warranty are extended to 5
- ✓ Transmissions parts such as: front axle, main transmission and driveline







# Genuine Yanmar lubricants

**The finest tractors deserve the finest lubricants.**

Because Genuine lubricants and coolant are so important for engine performance, proper maintenance and valid warranty, Yanmar recommends SAE10W30 premium diesel oil for its tractors, equipped with Stage V engines.

Our Genuine lubricants offer low temperature protection against wear and are formulated for optimum DPF life.

Available in bottles of 5L, 20L and 208L drum, the volumes suit the farmers and are loved by service shops.



# Yanmar Service Kits

**All-inclusive peace of mind.**

Quick and hassle-free maintenance with a full range of all-inclusive service kits for each tractor model. Service kits save time and money when servicing Yanmar tractors while offering an attractive price advantage. The maintenance kits contain all necessary Genuine Yanmar parts and components, manufactured according to the highest Yanmar standards. For optimal performance, service intervals have been further optimized to 50, 250, 500 hours or after 1 or 2 years.



Scan for more information.





Specifications

R = ROPS  
Q = CABIN

MODEL		SA222-R (SA222-Q)	SA326-R (SA326-Q)	SA426-R (SA426-Q)		YM347-R	YM359-R	YT235-R (YT235-Q)	YT347-R (YT347-Q)	YT359-R (YT359-Q)
ENGINE										
Engine name		3TNM72-D	3TNV76-UD	3TNV76-UD		4TNV88C	4TNV98C	3TNV88C	4TNV88C	4TNV98C
Engine power (UN Regulation No. 120)	kW	16,1	18,9	18,9		35,0	43,9	25,5	34,3	43,9
Engine power	hp	22,0	26,0	26,0		47,0	59,7	35,0	47,0	60,0
Number of cylinders		3	3	3		4	4	3	4	4
Size of engine	ccm	904	1.116	1.116		2.189	3.319	1.642	2.189	3.318
Torque	nm	55,7	67,8	67,8		142,6	205,0	105,4	140,4	199,0
Engine speed	1/min	3.000	3.000	3.000		2.800	2.500	2.800	2.800	2.500
Alternator	a	12V/55	12V/55	12V/55		12V/55	12V/55	12V/40 (12V/55)	12V/55	12V/55
Battery	ah	12V/54	12V/54	12V/54		12V/70	12V/70	12V/51	12V/70	12V/80
TRAVELLING SECTION										
Transmission type		Hydrostatic	Hydrostatic	Hydrostatic		Mechanical full synchronized	Mechanical full synchronized	Hydrostatic	i-HMT	i-HMT
Brake system		Multiple wet brake disk	Multiple wet brake disk	Multiple wet brake disk		Multiple wet brake disk	Multiple wet brake disk	Multiple wet brake disk	Multiple wet brake disk	Multiple wet brake disk
Drive		Selectable 4WD	Selectable 4WD	Selectable 4WD		Selectable 4WD	Selectable 4WD	Selectable 4WD	Selectable 4WD	Selectable 4WD
Differential lock		*	*	*		*	*	*	*	*
Turning circle (inner radius)	mm	2.400	2.600	2.600		Left: 4.720 / Right: 4.760	Left: 4.720 / Right: 4.760	2.900	2.920	2.920
Number of ranges		2	2	2		12F+12R (incl. creep)	12F+12R (incl. creep)	3	3	3
Max. Speed (*highest gear)	km/h	13,0 (13,2)	23,3	23,3		25,9	25,9	29,7	31,0	31,0
Towing capacity - not brokened	kg	700	700	700		3.000	3.000	2.000	1.500	1.500
Towing capacity - brokened	kg	1.600	1.600	1.600		6.000	6.000	2.500	6.000	6.000
Front axle load max.	kg	700	740	740		1.600	1.600	980	1.600	1.600
Rear axle load max.	kg	1.000	1.000	1.000		2.800	2.800	1.800	2.300	2.300
Max. allowed weight	kg	1.475 (1.700)	1.475 (1.740)	1.475 (1.740)		3.660	3.660	2.135 (2.300)	3.185 (3.675)	3.185 (3.675)
PTO power rear	kW	11,0	14,5	14,5		26,5	34,0	20,9	26,0	33,4
Rear PTO, speed	1/min	540	540	540		540 / 750 RPM@ 2430 min <sup>-1</sup>	540 / 750 RPM@ 2430 min <sup>-1</sup>	540	540 / 750	540 / 750
Rear-PTO	Type	1 3/8, 6 splines	1 3/8, 6 splines	1 3/8, 6 splines		1 3/8, 6 splines	1 3/8, 6 splines	1 3/8, 6 splines	1 3/8, 6 splines	1 3/8, 6 splines
Mid. PTO speed	1/min	2.000	2.000	2.000		NA	NA	Option (2000)	NA	NA
Front-PTO: speed	1/min	2.000	1.000	1.000		NA	NA	1.000	1.000	1.000
Front-PTO: 2000 1/min, 1, 15 splines		Option	Option	Option		NA (After market)	NA (After market)	Option	Option	Option
Fuel tank capacity	l	23	23	23		48	48	27	48	48
Hydraulic oil tank capacity	l	15	15	15		29	29	31	29	29

Specifications are subject to change



## Specifications

**$R = ROPS$**   
 **$Q = CABIN$**

MODEL		SA222-R (SA222-Q)	SA326-R (SA326-Q)	SA426-R (SA426-Q)		YM347-R	YM359-R	YT235-R (YT235-Q)	YT347-R (YT347-Q)	YT359-R (YT359-Q)
Steering system		Hydraulic powered	Hydraulic powered	Hydraulic powered		Hydraulic powered	Hydraulic powered	Hydraulic powered	Hydraulic powered	Hydraulic powered
Capacity hydro pump	l/min	28,3	28,3	28,3		38,5	38,5	41,8	60,0	55,5
Steering pump	l/min	13,2	13,2	13,2		21,5	21,5	15,3	21,7	20,1
Pump for hydraulics	l/min	15,1	15,1	15,1		17,0	17,0	26,5	38,3	35,5
Hydraulic pressure	bar	130	167	167		167	167	167	167	167
Hydraulic connections	nm	2 Sets	2 Sets	2 Sets		2 Sets	2 Sets	2 Sets	2 Sets	2 Sets
3-POINT LIFT CAPACITY										
Rear	kg	510	713	713		1.450	1.430	950	1.660	1.660
61 cm behind lift point - rear	kg	397	548	548		1.250	1.250	700	1.400	1.400
Front	kg	325	530	530		NA	NA	430	850	850
61 cm behind lift point - front	kg	280	425	425		NA	NA	390	650	650
DIMENSIONS AND WEIGHT										
Total length	mm	2.699	2.793	2.793		3.715	3.715	3.063	3.355	3.355
Total width	mm	1.198 (1.197)	1.436	1.436		1.420 - 1.723 *1	1.420 - 1.723 *1	1.267	1.639 (1.569)	1.569 *1
Ground clearance	mm	160	260	260		Min. 227 - Max. 336	Min. 227 - Max. 336	289	380	380
Wheel base	mm	1.470	1.600	1.600		1.970	1.970	1.650	1.927	1.967
Industrial wheel set r4 size: *2	inch	FT:18x8.50-10 RT: 26x12.00-12	FT: 23x8.50-12 RT: 12-16.5	FT: 23x8.50-12 RT:14-17.5		-	-	FT: 25x8.5-14 RT:15-19.5	FT: 10.00-16.5 RT: 17.5-24	FT: 10.00-16.5 RT: 17.5-24
Agri wheel set r4 size *2	inch	-	-	-		FT: R1, 200/70R16 (Radial Wide Low) RT: R1, 360/70R20 (Radial Wide Low)	FT: R1, 280/70R16 (Radial Wide High) RT: R1, 380/70R24 (Radial Wide High)	-	-	-
Height	mm	1.515 (2.070)	1.675 (2.070)	1.675 (2.070)		2.380	2.380	2.442 (2.060)	2.450 (2.310)	2.450 (2.310)
Weight	kg	768 (1.100)	846 (1.190)	846 (1.190)		2.085	2.085	1.110 (1.280)	1.800 (2.250)	1.900 (2.406)
Midmower m60, width	cm	188	188	188		NA	NA	188	NA	NA
Midmower cutting width	cm	152 (151)	151	151		NA	NA	152	NA	NA

\*1 = Adjustable rim  
\*2 = More types available

Specifications are subject to change



# ***Your nearest Yanmar dealer***

**Wherever you are, wherever you go,  
wherever you work. Yanmar is right  
there for you.**

Yanmar's European headquarters in the Netherlands supports a sales organisation covering the whole of Europe. Furthermore, the company's sales and service network operates in more than 130 countries.

[www.yanmar.com/eu/dealerlocator](http://www.yanmar.com/eu/dealerlocator)







**Regional Office / Sales & Service**

Yanmar Europe B.V.  
Brugplein 11, 1332 BS Almere, The Netherlands  
T: +31 (0)36 549 3200  
F: +31 (0)36 549 3209  
E: [agrienquiry-yeu@yanmar.com](mailto:agrienquiry-yeu@yanmar.com)  
[www.yanmar.com/eu](http://www.yanmar.com/eu)

**Head Office**

Yanmar Co., Ltd.  
YANMAR FLYING-Y BUILDING  
1-32 Chayamachi, Kita-ku,  
530-8311 Osaka, Japan  
[www.yanmar.com](http://www.yanmar.com)