

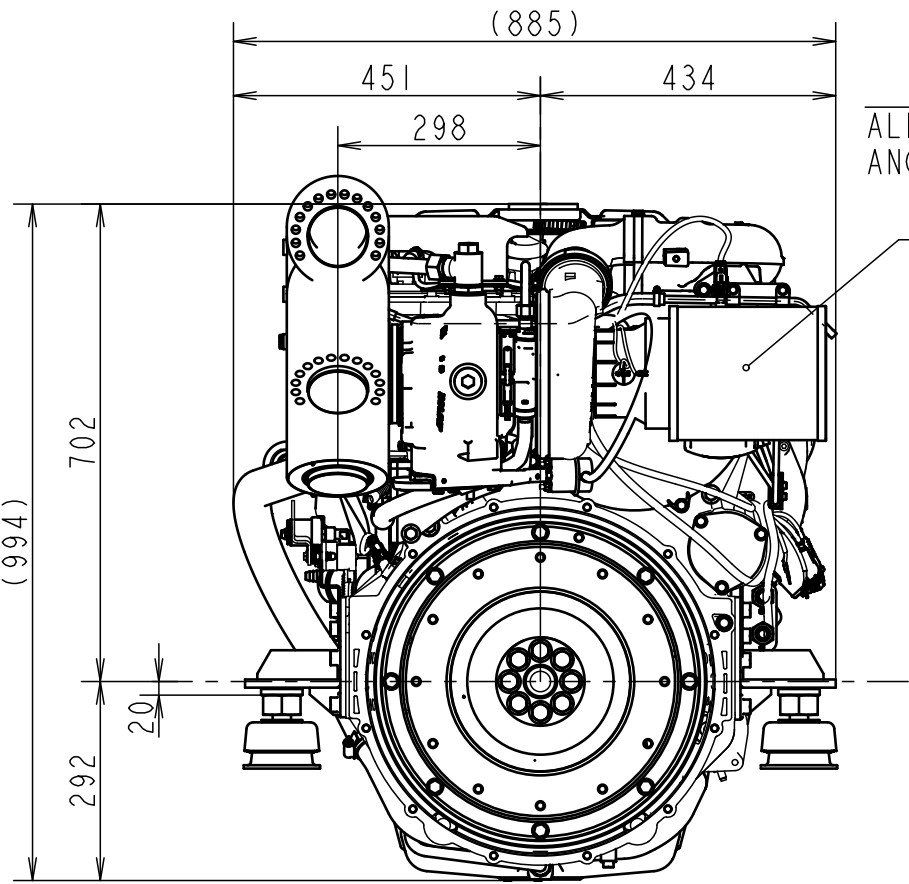


C A R E E R

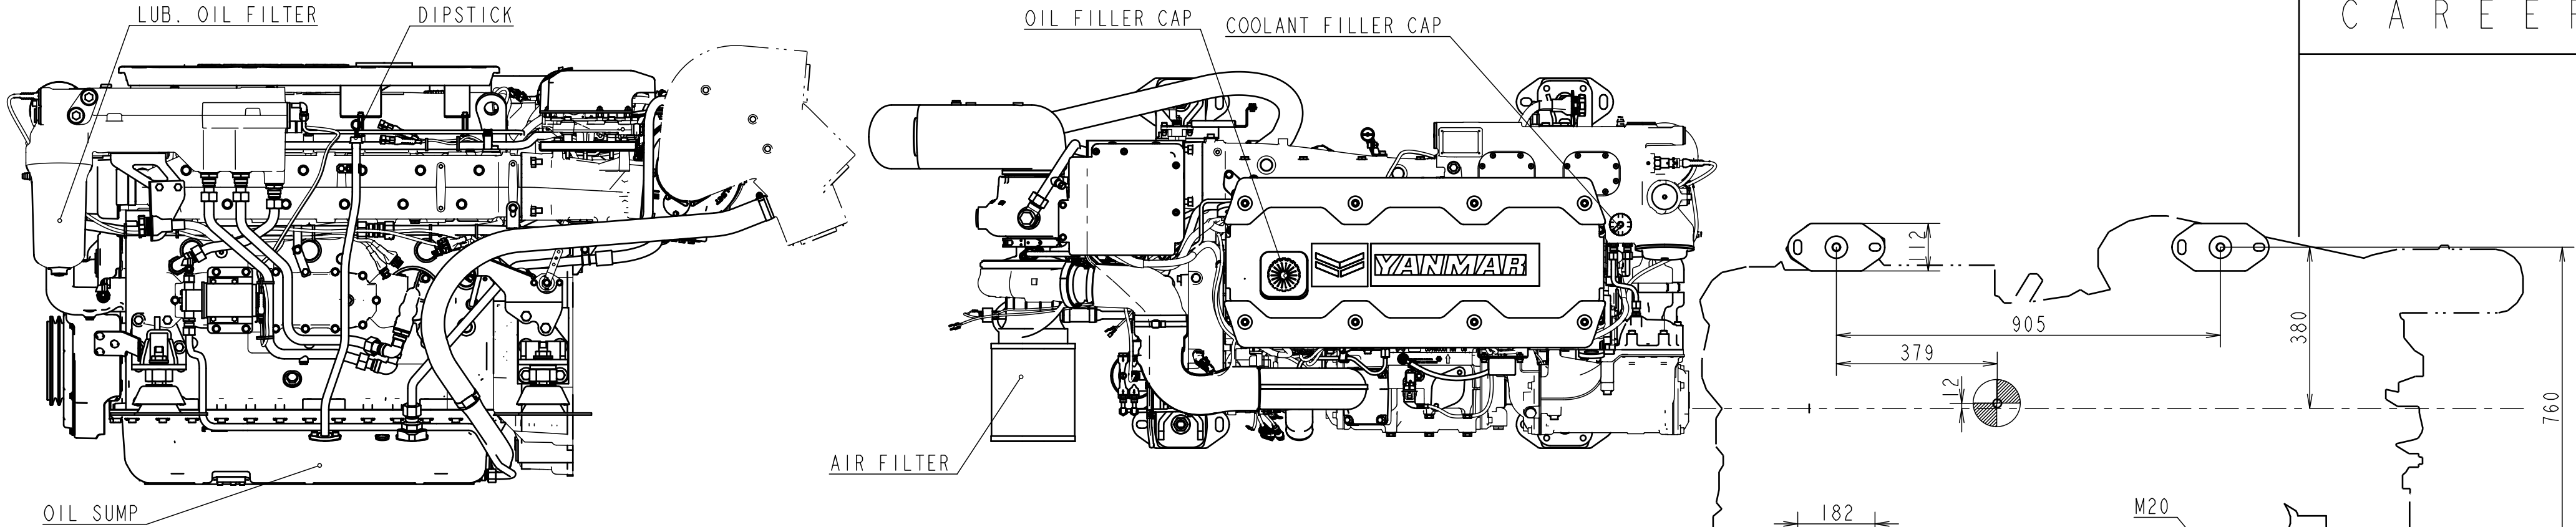

MIXING ELBOW
ALLOWABLE INSTALLATION
ANGLE BETWEEN 15 TO 45

AIR FILTER

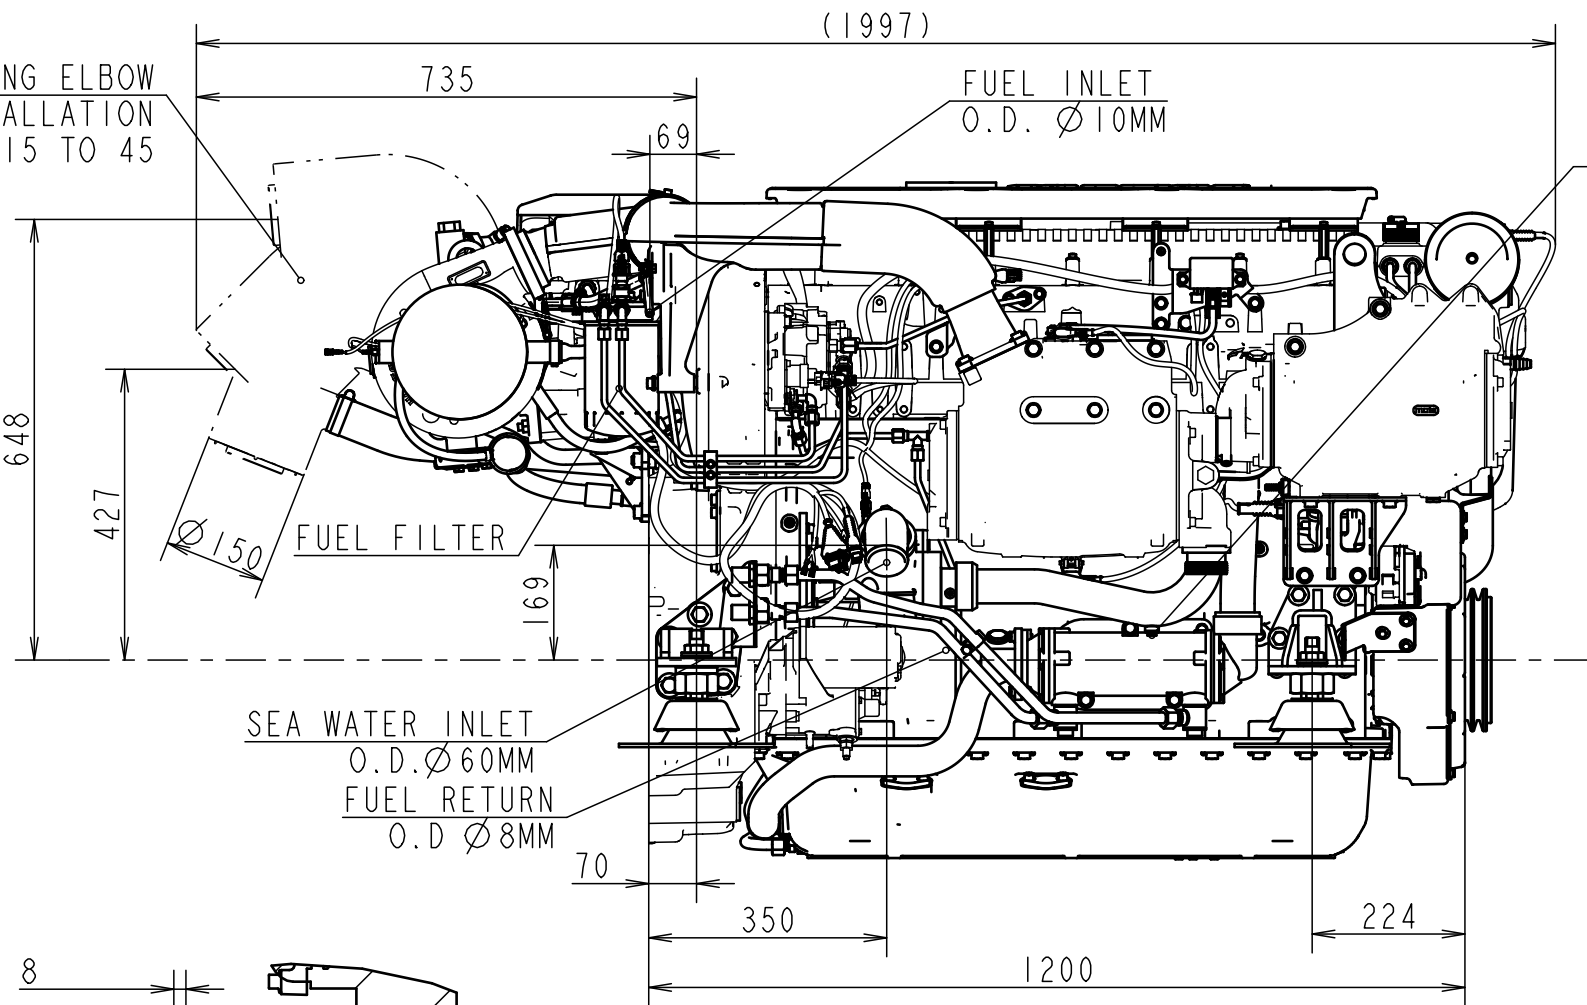


SEA WATER INLET
O.D. Ø 60MM
FUEL RETURN
O.D. Ø 8MM

FUEL FILTER

FUEL INLET
O.D. Ø 10MM

SEA WATER DRAIN PLUG
M10x1,25MM

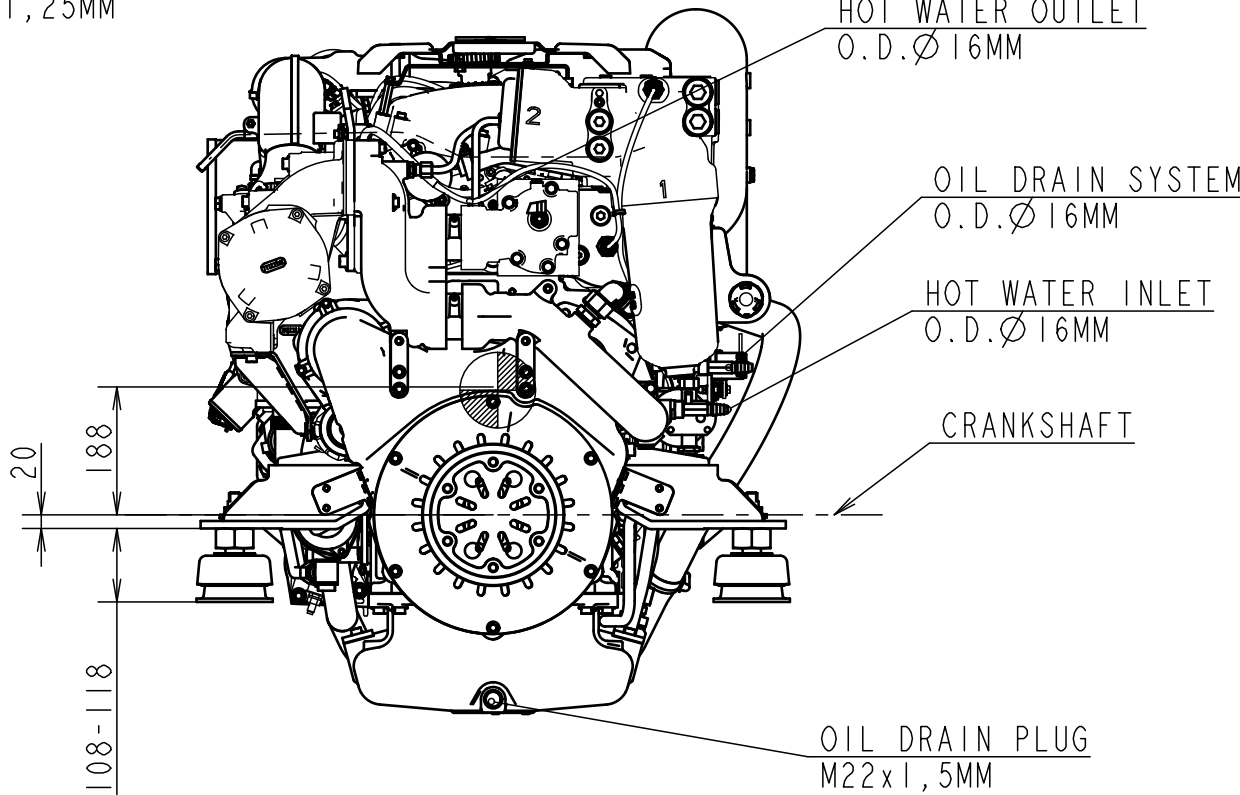


HOT WATER OUTLET
O.D. Ø 16MM

OIL DRAIN SYSTEM
O.D. Ø 16MM


HOT WATER INLET
O.D. Ø 16MM

CRANKSHAFT

OIL DRAIN PLUG
M22x1,5MM

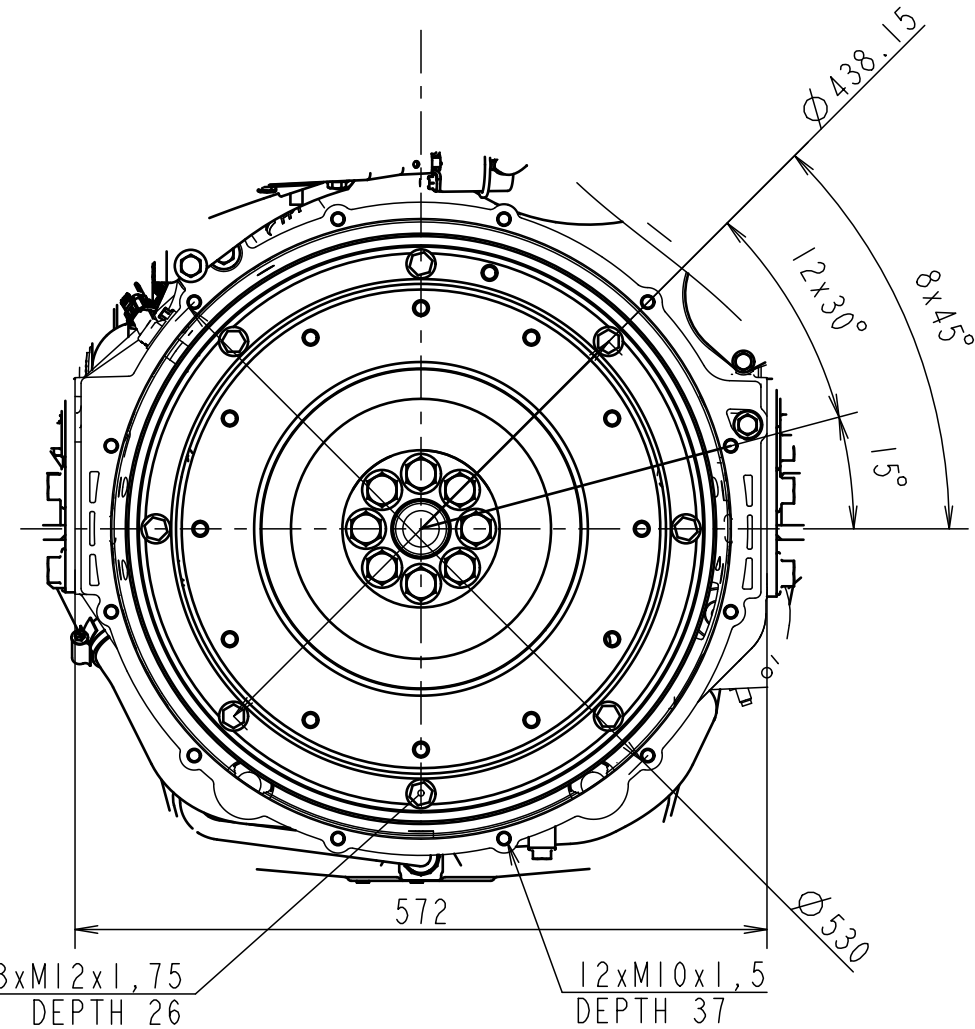

DETAIL OF FLYWHEEL OUTPUT SIDE

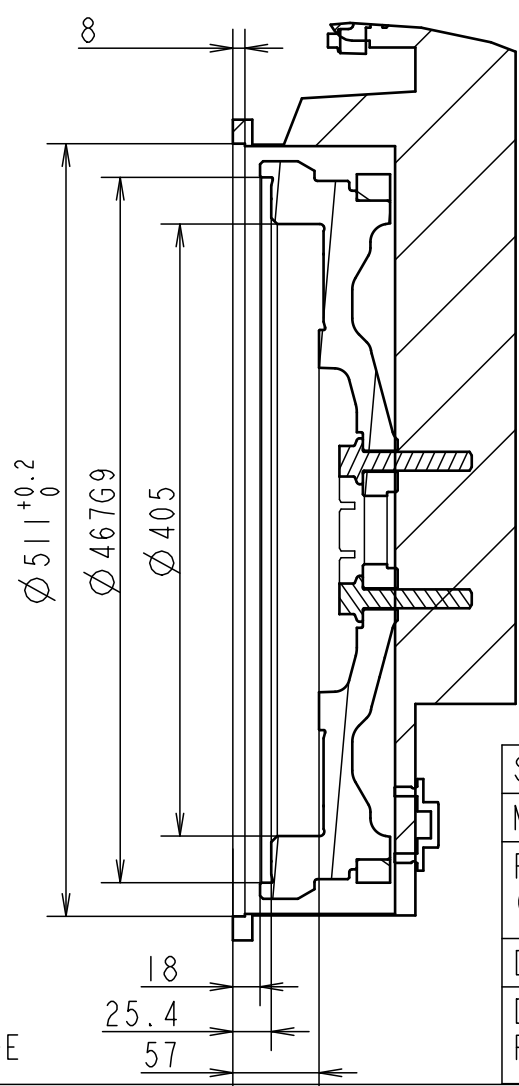

SHOWS CENTER OF GRAVITY

量産用
FOR MASS PRODUCTION

SPECIFICATIONS			
MODEL	6LT 500	6LT 580	6LT 640
FUEL STOP POWER (ISO 8665) kW(PS)	368 KW	426 KW	471 KW
(FLYWHEEL OUTPUT)	min - 2530	2530	2530
DRY WEIGHT	kg 1100		
DIRECTION OF CRANK SHAFT ROTATION	COUNTER-CLOCKWISE VIEWED FROM STERN		

SEC.MANAGER			MODEL	6LT 500	6LT 580	6LT 640				SCALE	9:200											
CHECKED				SPECIALIST	QTY	I	I	I				MATERIAL										
DESIGNED		DRAWN	DATE:Y.M.D	NAME	6LT ENGINE OUTLINE																	
AMJD			2022.06.14																			
YANMAR							CODE							DRAW SIZE	A2							
YANMAR MARINE INTERNATIONAL B.V.								B2-63200-0010														