



YANMAR

TRACTOR

YM351A | YM357A

51HP

57HP



Head Office

YANMAR AGRIBUSINESS CO.,LTD.

Umeda Gate Tower
1-9, Tsuruno-cho, Kita-ku, Osaka
530-0014, Japan
www.yanmar.com/jp/

Headquarters

YANMAR S.P. CO., LTD.

Ladkrabang Industrial Estate
115 Soi Chalongkrung 31 Lamplatiw,
Ladkrabang, Bangkok 10520 Thailand
T : +66 2326 0700-7
F : +66 2326 0709
www.yanmar.com/th/

Printed 2019.01

SMARTASSIST

GO *NEXT*

Take agriculture to the next level

Fly through the workday with the YM's exceptional power and performance, while its strength and durability will keep it at your side season after season.

Drive your efficiency to the limit with our advanced technological solutions.

Meet YANMAR's YM Series tractor.

Reap a future that looks to a new agriculture beyond imagination.






Farm smarter with high-tech solutions

Using YANMAR's advanced technology, farming has never been easier. Check your fields from your smartphone.

Including SMARTASSIST Remote as standard

Geolocation by GPS and other sensors lets you know exactly how and where your tractor is working. Reduce downtime and errors to save money.

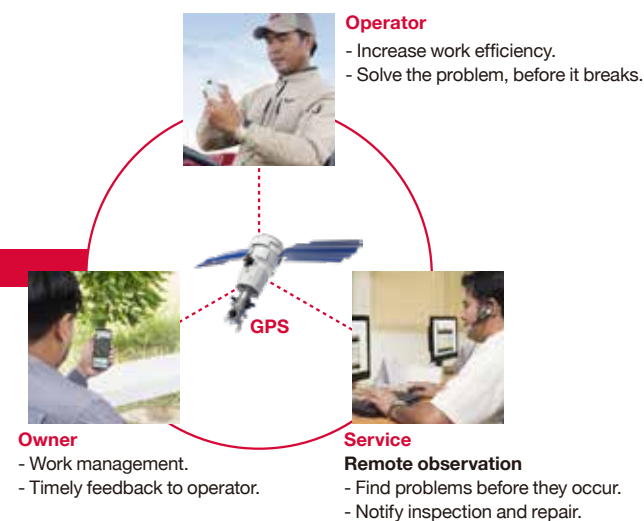

Watch the movie

SMARTASSIST



Check location and work status at a glance.



Measure work area accurately.



Set location and work period in advance.



Easily inspect work logs.



See the hours worked on a graph.



View alerts as they happen.



Powerful and fuel-efficient



Watch the movie

YANMAR's original combustion technology gets the most out of every drop of fuel for a powerful engine that is long lasting.

Direct-injection diesel engine

Developer of the world's first small diesel engine, YANMAR's extensive fuel injection and combustion technology comes together in this powerful and reliable package. Whether plowing or puddling, the YM tractor offers excellent fuel efficiency and outstanding durability. Try the YM357A's three-liter, long-stroke engine for superior power and reliability.




Illustration YM357A.



Monoplunger fuel injection pump

The pump supplies fuel at uniformly high pressure to the fuel injector of each cylinder, for even combustion, smoother power and less vibration.



Fuel injector

The precision designed injector nozzle atomizes the fuel at high pressure for introduction to the cylinder.


Illustration YM357A.



Original combustion chamber design

The combustion chamber is specially shaped to promote an even fuel-air mixture and complete combustion for high power and low emissions.

Illustration YM357A.



Two-stage air filter

Two-stage filtration removes grit and dust from the air intake to prevent piston ring wear.



Work faster




Watch the movie

Get more done with faster, more accurate operation.

Get more done with faster, more accurate operation.

Gear ratios widely overlap all speed ranges so that you can get the best torque for your work speed, using less fuel and saving you money.

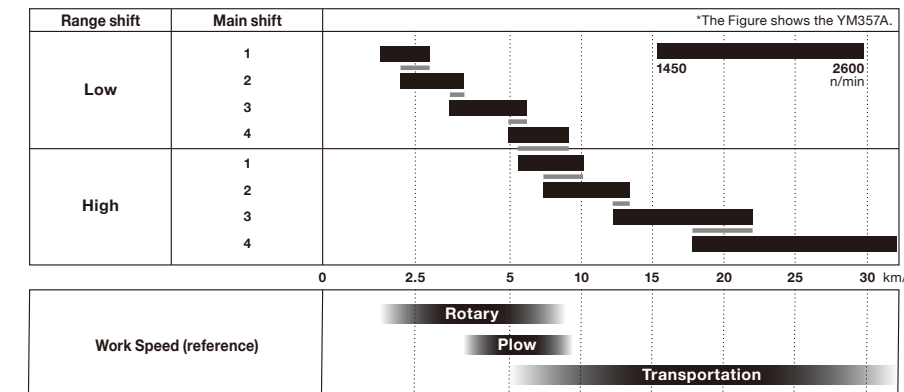


Choose the right PTO speed for the job

The PTO speed of YM tractor is optimized with the rated 540 rpm at lower engine speed. With ensuring a beautiful finish of rotary tillage, pursue to highly balancing faster work and fuel saving.



Type of use 1 : Economy PTO

Use of standard PTO 540 rpm with lower engine speed allows the operator not only to realize a beautiful finish of rotary tillage, but also to save more fuel.



Type of use 2 : High work efficiency

Wider range of engine speed (PTO speed) provides the operator with options how to set optimum working speed for the job. Increase engine speed to pursue higher work efficiency with ensuring a beautiful finish.

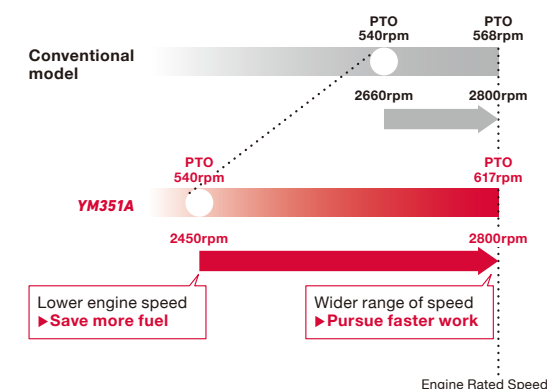

2 Speed PTO

From low-speed rotary tillage to high-speed puddling, select the right PTO speed for the job.



Paddy, dry field, or hauling



Watch the movie

The YM is a versatile tractor that has no equal in the demanding conditions of Southeast Asian agriculture.

Newly designed rotary tiller

The innovative design means that even tilling at high speed causes little loss of power as most soil does not travel into the rotary, while the long stroke of the rear cover rakes the soil for a more beautiful finish.



Long rear cover

The rear cover is longer by 15% than the conventional one, with the broader raking surface giving a beautiful finish.



Ground clearance

Great clearance is the key to powering on in muddy conditions or passing over crops without damaging them.



Hydraulic lift capacity

Even large and heavy implements like plows or planters can be raised with ease to perform wide range of work.

*at lower link end.



Tight turns

Turn the wheels all the way over to their maximum 55 degrees for tight turns at the end of the row and those tough corners.



Drawbar Hitch

Equipped with a drawbar (clevis type) as standard for hauling and towing a variety of loads.

Everything you need to get the job done


Easy to operate with comfort
that lets you spend long hours
working.



Watch the movie

Full synchromesh transmission

A full synchromesh transmission allows you to smoothly
change direction and speed without gear noise,
even when the tractor is still moving,
just by shifting the reverser lever
and main shift lever.

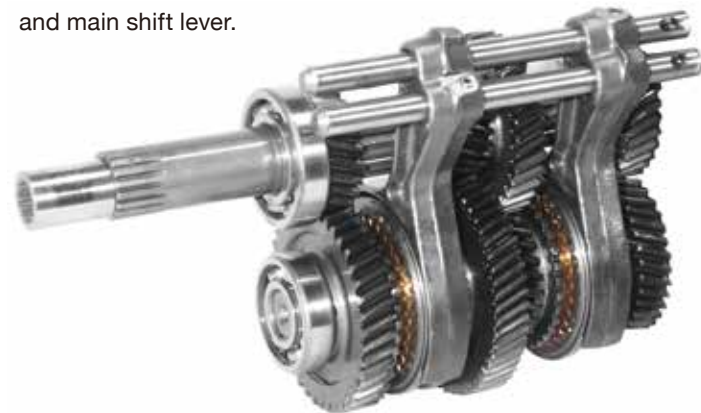



A Synchronized reverser lever

Change direction, simply by
shifting the lever conveniently
located by the steering wheel,
to back out of tight corners.



B 4 speed synchronized main shift lever

Select the best speed for the
job by combining the smooth
changing synchronized
main shift with the 2 speed
range shift.

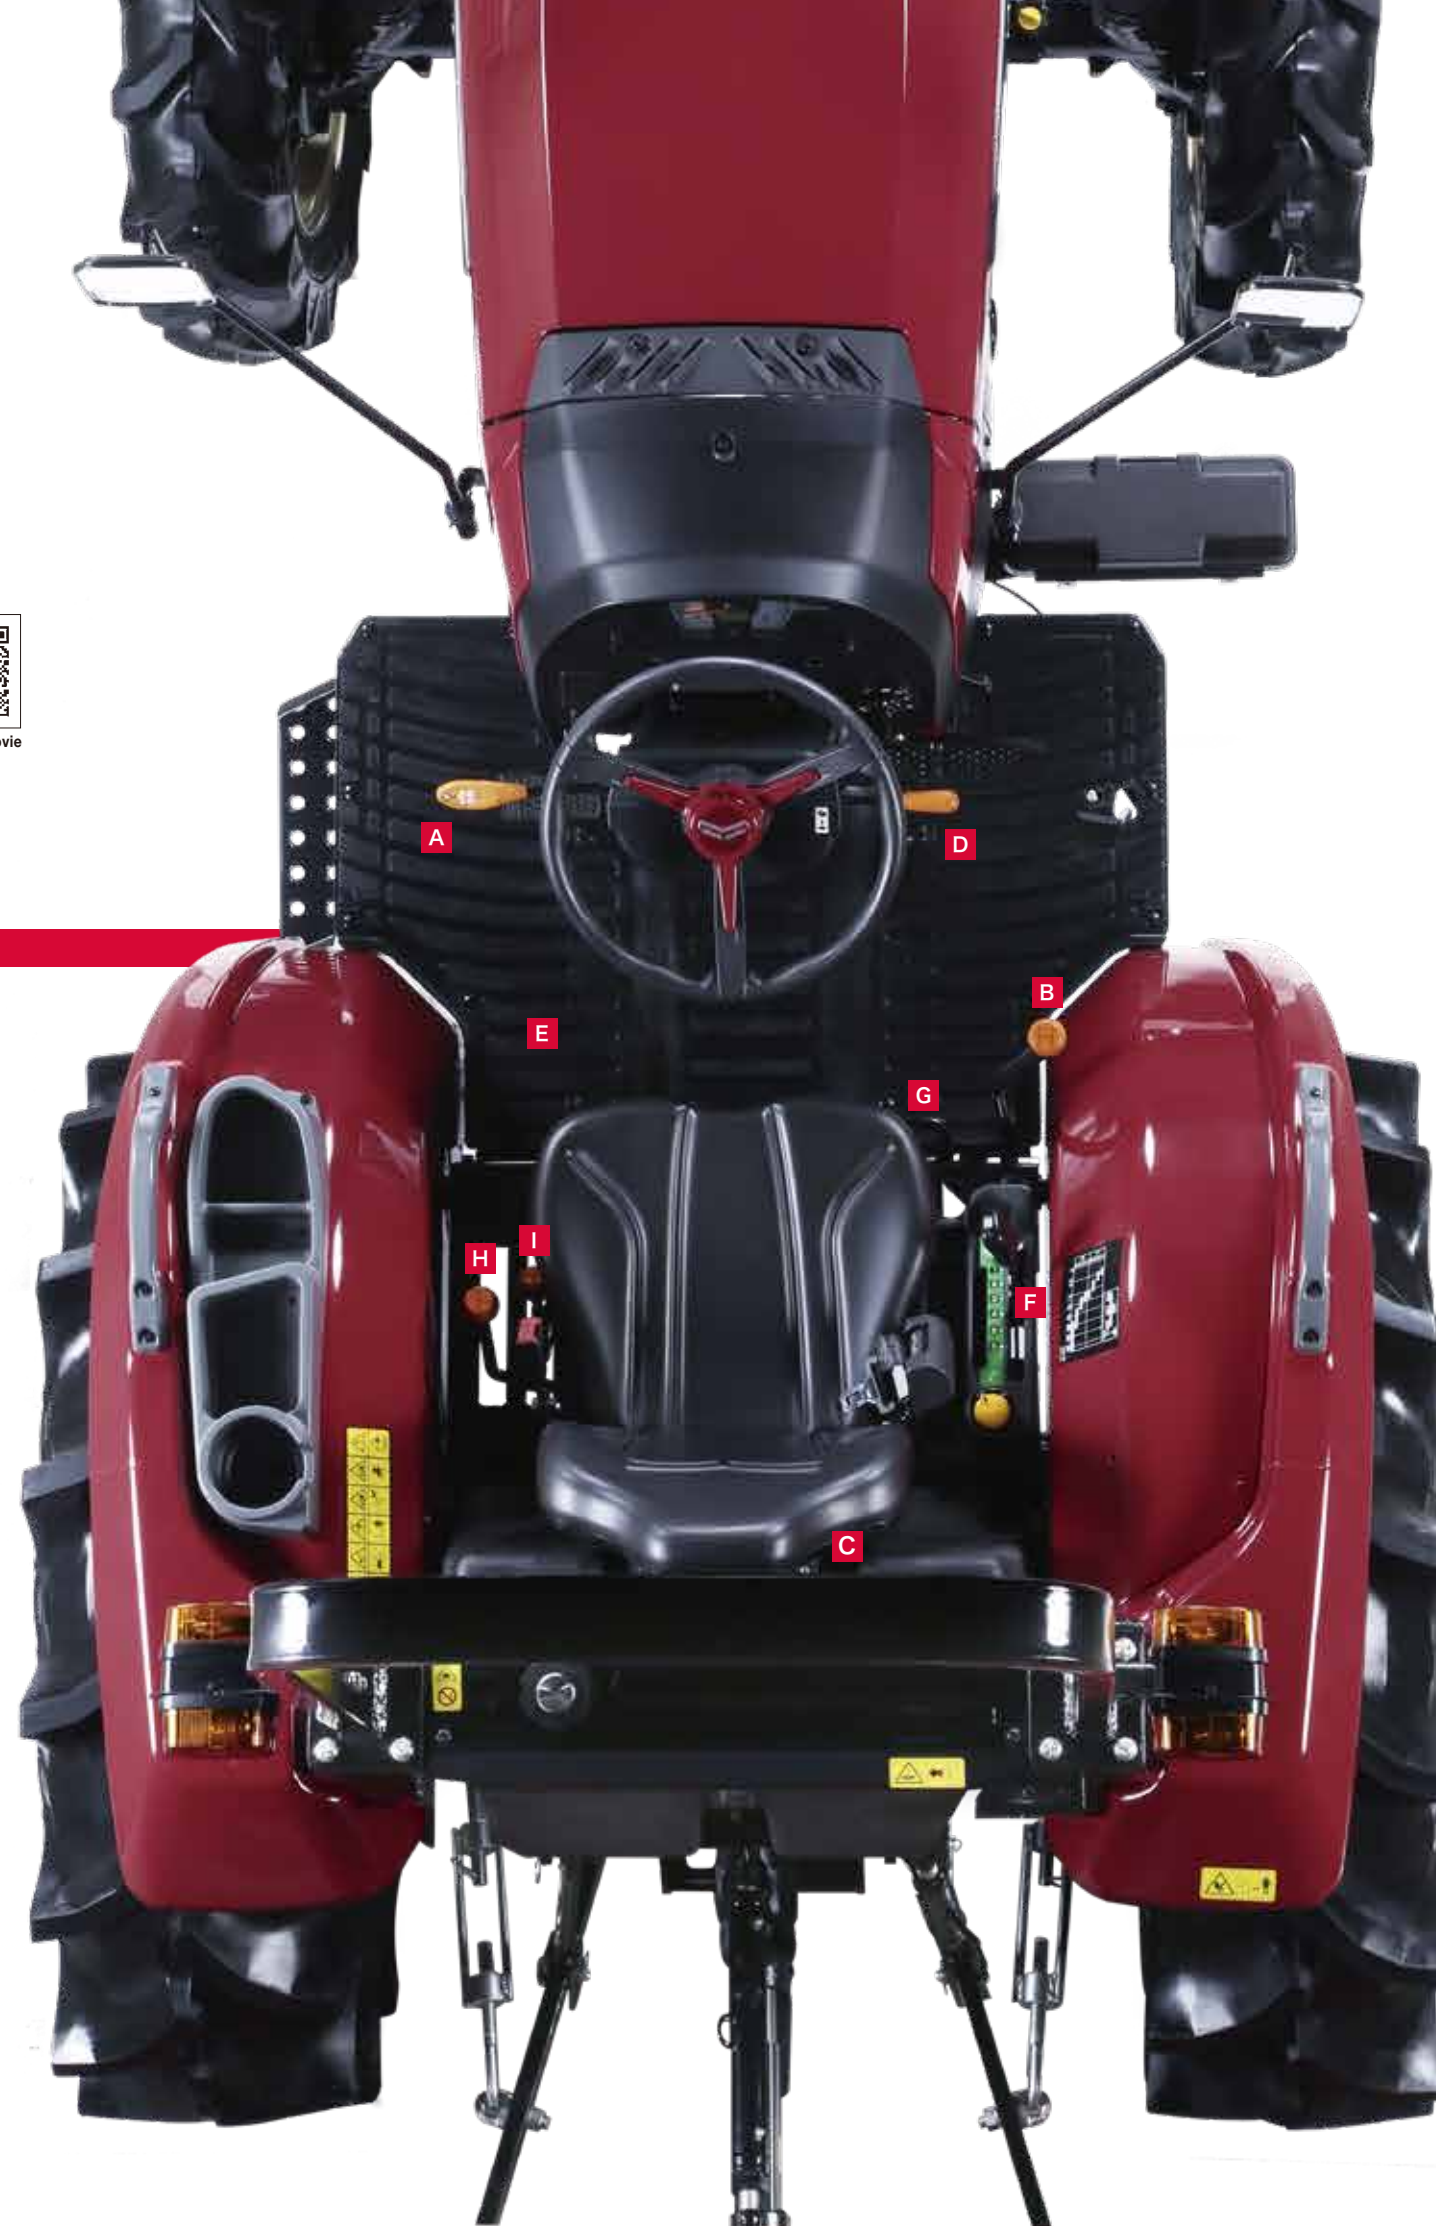


C Deluxe seat with suspension

Shift forwards or back with a
convenient lever and enjoy stepless
adjustment of seating suspension for
comfort that lets you work all day.



Stepless adjustment knob behind seat back.




D Fully hydraulic power steering

Even heavy going muddy
paddies are no problem with
hydraulic power steering
driving you through the
toughest turns.



E Flat deck

A flat deck lets you slide
smoothly into the seat while
offering the operator the
comfort of a broad and
stable work platform.



F 3-Point hitch control lever

Put your implement exactly
where you want it with highly
responsive and fine-tuned
depth control.



G Differential lock pedal

The pedal locks the
differential to keep both
wheels moving and help you
get through difficult paddies.



H 2 speed range shift lever

The 2 speed range shift can
switch between high and low
speeds for use in a wide
range of applications from
tilling in paddy fields to
traveling between fields.



I Four-wheel drive lever

A simple lever lets you switch
between two and four-wheel
drive for greater traction.



Quality that's built to last




Watch the movie

Drivetrain and core parts are made with high-durability casting for long-lasting strength.

Engine, transmission and rotary are all designed by YANMAR

The powertrain of the engine at the heart of the tractor, the transmission and the rotary gearbox it drives, are made tough with highly durable casting. Because Yanmar designs these core components itself, they are built to work together for maximum power transfer. With no one component subject to excessive stress, durability is greatly increased.

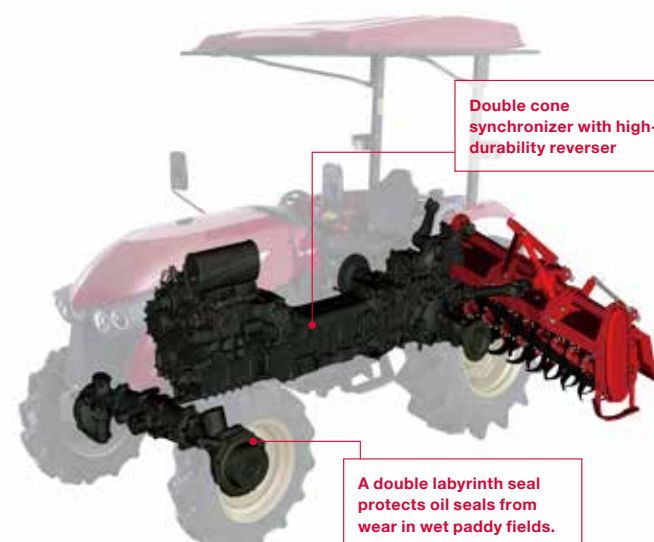

Double cone synchronizer with high-durability reverser

A double labyrinth seal protects oil seals from wear in wet paddy fields.



Dedicated hydraulic clutch for PTO

The hydraulic clutch was chosen for its superior resistance to wear and high durability. It is also independent of the travel clutch and isolates it from stress or damage from farm work.



One-touch PTO button

Stop the PTO at the touch of a button to prevent damage to the PTO drive shaft when raising implements. There is no need to stop the tractor.



Other Standard Equipment



High-capacity fuel tank

A capacity of 50 liters lets you work all day without having to stop for refueling.



Lockable fuel cap

Secure your valuable fuel supply.



Side mirrors

Right and left side mirrors are standard.



High visibility LCD meter

The intuitive LCD display lets you see what you need, when you need it, even in daylight.



Projector-type headlight

Low and high beam let you pierce through the darkness to keep working after the sun goes down.



12 V accessory socket

Charge smartphones and other devices while on the go. (Cigar USB Socket not included)



ROPS

Yanmar provides ROPS as standard to reduce the chance of injury in the event of tractor roll over.



Console

Convenient storage for drinks, devices and whatever else you need.



Seat belt

The standard-fitted seatbelt helps prevent injury in the event of an accident.



Tool box

No need to head back for tools when this toolbox is right near your feet. (Tools not included)



Canopy

A canopy protects the operator from the harsh elements.



Wide Step

A wide step allows the operator to get on / off the tractor smoothly.

Easy Maintenance



Hood access

The gas-damper equipped hood opens to a full 80 degrees for easy access.



Grease fittings

Allocating greasing nipples to appropriate locations. Periodical refilling of grease maintains the life of your machine.



Large fuel / water separator

Prevents water/moisture and dust from entering the engine.



Large-capacity maintenance-free battery

Gives you the power to get your working day started. Consult the battery indicators for any necessary maintenance.



Engine oil / engine oil filter

Well accessible without removing any surrounding parts like side covers. Assisting easy inspection of engine oil.

Genuine Spare Parts



Yanmar's genuine spare parts support you for long-machine life and maximize the work performance for long time.



Long-life transmission fluid TF500T

A long life of up to 600 hrs, means you save time and money on transmission fluid changes. (Sold separately)



Watch the movie

Scan this QR code to access the Yanmar genuine parts video on Youtube.

Dealer options



Front weight (1A8253-10300) Front bracket (1A8253-10200)

Mount up to five 30kg weights for added stability.



Rear wheel weight (1A8253-34990)

Mount any combination of one 20kg, and two 25kg weights for a maximum of 70 kg, on the rear wheels for added traction.



Rear working light (1A8253-54100)

Light up the night with this rear-mounted lamp.



ROTARY

Used : Tillage / Stamping / Reversing / Leveling

Model Name			Y1800RH	Y1900RH	Y2000RH
Transmission system	Gear Chamber	Type	Pinion gear bevel straight type		
	Chain Chamber	Ratio	14T / 27T		
		The side chain			
Dimension : width × length × height		mm	1971×952×1026	2071×952×1026	2171×952×1026
Weight		kg	325	335	345
Width of area work		mm	1770	1870	1970
Type of blade			L&C shape		
Quantity of blade	Left	pieces	27	27	30
	Right		27	27	30
Speed (Blade axle / PTO axle)		rpm	237 / 540		
Applied Tractor horse power		HP	51 - 57		
Work Speed (Reference)		km/h	2 - 7		



POLY PLOW

Used : Tillage / Stamping / Reversing / Leveling

Model Name		Y2460PDK	Y2450PDK	Y2460PDL	Y2260PDL,W	Y2450PDL
Disc size	inch	24	24	24	22	24
Quantity of disc	pieces	6	5	6	6	5
Width×Length×Height	mm	1510×2130×1095	1510×2130×1095	1450×2200×980	1400×2200×955	1450×2200×980
Weight	kg	445	450	416	372	390
Working Depth	mm	150 - 200	150 - 200	100 - 150	100 - 150	100 - 150
Working Width	mm	1,420	1,215	1,385	1,275	1,385
For soil		Any soil	Any soil	Any soil	Any soil	Any soil
Applied Tractor horse power	HP	39 - 51	39 - 51	45 - 51	45 - 51	45 - 51
Work Speed (Reference)	km/h	3 - 8	3 - 8	3 - 8	3 - 8	3 - 8



DISC PLOW

Used : Tillage / Reversing

Model Name		Y2430DPK	Y2440DPK	Y2240DPL,W	Y2430DPL
Disc size	inch	24	24	22	24
Quantity of disc	pieces	3	4	4	3
Width×Length×Height	mm	1235×2335×1200	1415×2810×1265	920×2300×1050	1020×2300×1100
Weight	kg	475	560	305	389
Working Depth	mm	200 - 250	200 - 250	150 - 200	200 - 250
Working Width	mm	860	1080	1420	1220
For soil		Any soil	Any soil	Any soil	Any soil
Applied Tractor horse power	HP	39 - 57	39 - 57	39 - 57	45 - 57
Work Speed (Reference)	km/h	3 - 8	3 - 8	3 - 8	3 - 8



FRONT BLADE

Used : Field maintenance / Movement of soil and compost

Model Name		Y1810FBG	Y1820FBG
Applied Tractor Model	HP	YM351A	YM357A
Gross Weight	kg	380	385
Working Width	mm	1800	1800
Height of Blade	mm	526	526
Minimum Ground Clearance	mm	304	314
Hydraulic Cylindere mention	Rod Diameter	mm	45
	Bore Diamiter	mm	55
	Stroke	mm	485
Work Speed (Reference)	km/h	3 - 4	



Main Specifications

Model				YM351A		YM357A	
Engine	Maker			YANMAR			
	Model			4TNV88		4TNV94L	
	Type			4 Cylinders, Direct Injection, Vertical, Water-Cooled, Diesel			
	Number of Cylinders			4			
	Bore and Stroke		mm	88 x 90		94 x 110	
	Total Displacement		L	2.190		3.054	
	Gross Power		kW (HP) / rpm	38.0 (51.0) / 2800		42.4 (57.0) / 2400	
	Fuel Tank		L	50			
Dimensions	Overall Length (without 3-point hit)		mm	3330		3380	
	Overall Width		mm	1580			
	Overall Height		mm	2570 / 2480 (without Canopy)			
	Wheel Base		mm	1900		1970	
	Min. Ground Clearance		mm	425			
	Tread	Front	mm	1252 (Standand) / 1404			
		Rear	mm	1238 (Standand) / 1320			
Weight			kg	1680		1790	
Traveling System	Tire	Front	inch	8 - 18			
		Rear	inch	13.6 - 26			
	Clutch			Dry, Single			
	Brake			Mechanical, wet disk			
	Steering			Hydrostatic power			
	Main shift			synchronized (4stage)			
	Reverser			synchronized Reverser			
	Number of shift			8 forward and 8 reverse			
	Travel speed	Forward	km / hr	2.4 - 28.0		2.6 - 29.4	
		Reverse	km / hr	2.4 - 28.0		2.6 - 29.3	
Hydraulic Unit	Hydraulic Control System			Position Control			
	3-Point Hitch			Category 1			
	Max. Lift Force	at lower link end	kN (kgf)	14.2 (1450)			
		24 inch behind	kN (kgf)	12.2 (1250)			
Power Take off (PTO)	Type			independent			
	Shaft Size			SAE 1 - 3 / 8, 6-Splines			
	Gear 1		PTO speed / engine rpm	540 / 2430		540 / 2096	
	Gear 2		PTO speed / engine rpm	740 / 2417		740 / 2064	

Note: All technical data, measurement and weight are approximate, and the manufacturer has the right to make alteration without prior notice.

