



YANMAR

Power Tiller

YZC



ヤンマー株式会社

〒530-8311 大阪市北区茶屋町1-32
YANMAR FLYING-Y BUILDING
yanmar.com



このカタログの仕様は、改良などにより、予告なく変更することがあります。



この印刷物は
植物油インキを使用しています。

⚠ 安全に関するご注意

- ご使用の際は、取扱説明書をよくお読みのうえ、正しくお使いください。
- 無理な運転は商品の寿命を縮め、故障・事故の原因となることがあります。
- 故障・事故を未然に防止するため、定期点検は必ずおこなってください。
- 保証書はご購入の取扱い店で必ずお受け取りください。

Sample

商品についてのご意見、ご質問は下記へ…

**NEW
DESIGN**



YOUR BEST PARTNER YZC

Width ROTARY
for Deep Tilling
and Soil Pulverization

POWER & ECOLOGY

JAPAN BRAND YANMAR
WITH ASIAN PEOPLE
MORE THAN 70YEARS.



"POWERFUL" & "LOW FUEL CONSUMPTION"
"GREAT QUALITY"
"DURABILITY"
YZC meets your expectation.



CAGE WHEEL & TILLING



DISK PLOW



RUBBER TIRE & TILLING



RAKE






TF110N / Diesel 583cc
MAX 11.0PS

HIGH PERFORMANCE

Maximum 11PS ENGINE acceptable.
Balance powerfulness and
low-fuel consumption.
Comfortable operation.




POWERFUL, LOW FUEL CONSUMPTION, LONG LIFE

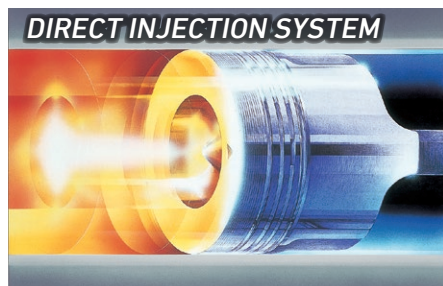

DIRECT INJECTION SYSTEM

POWERFUL, LOW FUEL CONSUMPTION, LONG LIFE

YANMAR's leading direct fuel injection system has greatly reduced the specific fuel consumption ratio.

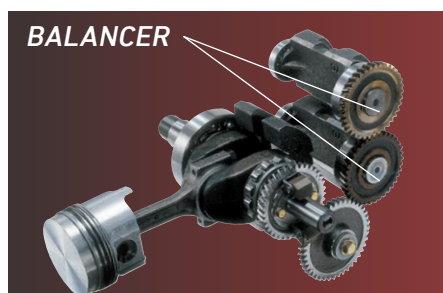

BALANCER

LOW VIBRATION


YANMAR's unique two-balancer shaft eliminates resonance by reducing both acceleration and amplitude. The imbalance is internally absorbed and as a result, vibrations are reduced at their source.



LARGE SIZE SILENCER

A large size silencer is adopted.

COMFORTABLE WORK, EASY MAINTENANCE

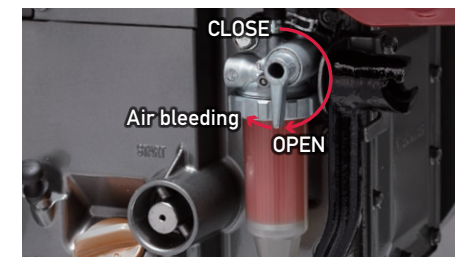

VISIBLE OIL/WATER SEPARATOR

An oil/water separator provided on the filter bowl allows at a balance checking of the water volume deposited in the filter. A separator with one-touch type automatic air bleeder allows air bleeding by simple lever operation. No fuel spillage, and no tools are required.



OIL SIGNAL

Oil signal color changes allow easy checking to see if lubrications oil pressure is normal.

BLUE : Normal pressure
RED : Abnormal pressure



EASY ADJUST

Adjustable V-belt tension without tools.




OIL-BATH TYPE AIR CLEANER

The oil-bath type air cleaner is adopted. Any fine dust is not missed and pure air is supplied.

HIGH *OPERABILITY* AND *PERFORMANCE*

Great operability to create high efficiency work

TRANSMISSION CAPABILITY

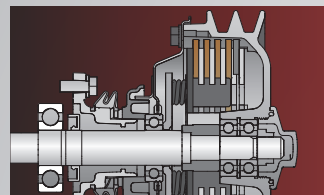

4 friction plates use.

MAIN CLUTCH LEVER



MAIN SHIFT LEVER



TREAD



RUBBER TIRE: 716 (Tread)
CAGE WHEEL: 1397 (Width)

ROTARY



YZC ROTARY Performance is
working width 660mm
maximum tilling depth 180mm
4 rotary speed by combination
of lever & chain case assembly
18 special tine for tilling in
both dry and wet field

DEPTH GAUGE



YZC Specifications

Model name				YZC-D	
Specification				R	LR
Body dimensions	Total length		(mm)	2145	2413
	Overall width		(mm)	853	
	Overall height		(mm)	1225	1110
mass (without engine)			(kg)	333	
Engine				TF110N	
Wheel	Pneumatic Tire	Size		5-13	
		Tread	(mm)	716	
	Cage wheel	Width		(mm)	1397
Traveling portion	V-Belt	Size		B67	
		Length	(in.)	67	
		Quantity	(pcs)	2	
	Speed Traveling at Engine speed 2400rpm (km/h)	With AG-Tire size 5-13	F1	1.35	
			F2	2.8	
			F3	9.35	
			R1	1.02	
Tilling portion	Tilling width		(mm)	660	
	No. of tine			18	
	Tilling depth		(mm)	180	
	Tilling capacity		(a/hr)	7 to 12	
	Speed position			4	

