




NET INTERMITTENT POWER Potencia Neta Intermitente	22.2 hp 16.6 kW
RATED SPEED Velocidad de Regimen	3600 RPM

3TNM72-HGE

Dimensions & Performance Data & Quick Specs	Length / Longitud	
	Length / Longitud	21.89 in (556 mm)
	Width / Ancho	
	Width / Ancho	16.38 in (416 mm)
	Height / Altura	
Height / Altura	22.17 in (563 mm)	
Dry Weight / Peso en Seco		
Dry Weight / Peso en Seco	242 lbs / 110 kg	

SPECIFICATION Especificacion	HGE
CYLINDERS Cilindros	3
BORE X STROKE Diámetro x Carrera	2.8 X 2.9 (in) 72 X 74 (mm)
DISPLACEMENT Cilindrada	55.1 (ci) 903 (cc)

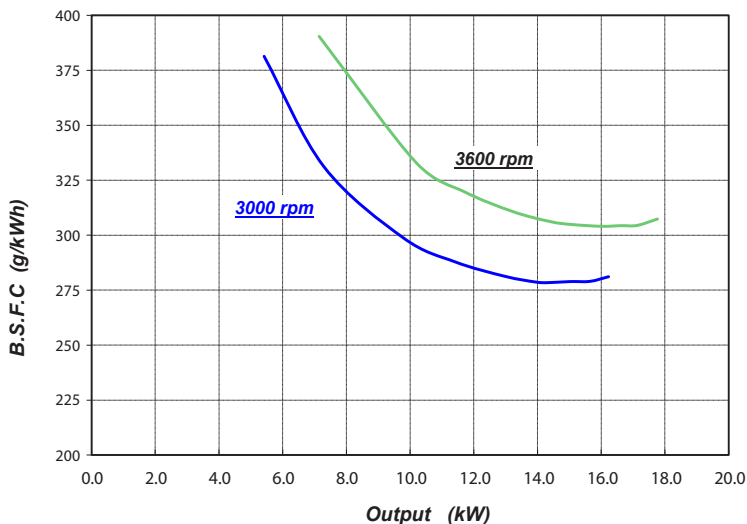

COMBUSTION TYPE Tipo de Combustion	Indirect Injection Inyeccion Indirecta
ASPIRATION Aspiracion	Natural Aspiration Aspiracion Natural
GOVERNOR TYPE Tipo de Gobernador	Mechanical Mecanico



Reliable & Durable

The TNM engines now proudly take up the running as Yanmar's premium small industrial diesel. They offer even more enhanced durability due to better block cooling, a stiffer crank and pistons, finer tolerance in the journal and more. CAE analysis has brought lower vibrations and higher strength to the mounting structure for even better reliability in heavy-duty jobs.



Clean Emissions

Building off the proven TNE design, Yanmar has achieved superior exhaust emissions by improving the combustion chamber and fuel injection equipment design. Engines are compliant with 2008 EPA Tier 4.



Fuel Delivery and Economy

A newly designed, In-line MC Fuel Injection Pump is utilized to assure more precise fuel delivery and control. The result is reduced emissions, improved performance over a wide range of applications and increased fuel economy which assures that Yanmar's reputation for superior starting characteristics continues.

Lubrication System

3.7L Capacity Deep Oil Pan

Electrical System

12V, 40 Amp Alternator

Fuel System

In-line MC Fuel Injection Pump

Cooling System

Water Pump, Belt Driven

Power Take Off

FWH-SAE #5 t=111
FW-SAE 6.5" CMP