



## S270V-1

### SKID STEER LOADER

POWERFUL 70.7-HP  
YANMAR FINAL TIER 4  
TURBOCHARGED DIESEL  
ENGINE

SUSPENSION SEAT FOR  
ALL-DAY COMFORT

SPACIOUS PANORAMIC-  
VIEW CABS

SELF-LEVELING SYSTEM  
AND RIDE CONTROL  
OPTIONAL

HYDRAULIC QUICK  
COUPLER OPTIONS

CORROSION-RESISTANT  
CYLINDER RODS

BEST-IN-CLASS HEIGHT-  
TO-BUCKET HINGE PIN

LEVEL II ROPS/FOPS  
OVERHEAD GUARD  
STANDARD

HIGH-FLOW HYDRAULICS  
OPTIONAL

### QUICK SPECS

Rated Operating Capacity	2700 lbs (1225 kg)
Net Power	70.7 hp (52.7) @ 2500 rpm
Operating Weight - approx.	8150 lbs (3697 kg)
Lift Height	130.3 in (3310 mm)

## Some guys see a tough job and back off. Don't be one of them.

Start every day knowing that no matter what it brings, you can handle it. With a towering lift height of 130.3 in., the Yanmar S270V-1 Skid Steer can load 2,700 lbs. into just about anything. And when you're not lifting heavy loads really high, the S270V-1 can put more attachments to use than you have jobs to do.

### INNOVATIVE FEATURES



#### NEW FINAL TIER 4 TURBOCHARGED DIESEL ENGINE

You can't afford to sacrifice the power to lift heavy pallets or haul massive bucket loads for the sake of efficiency. With Yanmar's Final Tier 4 turbocharged diesel engine, you don't have to. You get the power to lift up to 1.5 tons, plus the fuel economy to lift your operating margin, too.




#### SPACIOUS, COMFORTABLE CAB

With Yanmar's roomy and ergonomically comfortable cabs, you can put in a long day without feeling that way. You won't have to constantly jerk your head around to see where you're going or what you're doing, either. Windshields are wide and side screens are large for maximized visibility, improving both efficiency and safety.



#### CHANGE ATTACHMENTS WITH JUST A FINGER

Time spent changing attachments means less time you have to actually get work done. With our optional electronic attachment system, you can go from loading buckets of gravel to moving pallets of stone with virtually the push of a button.

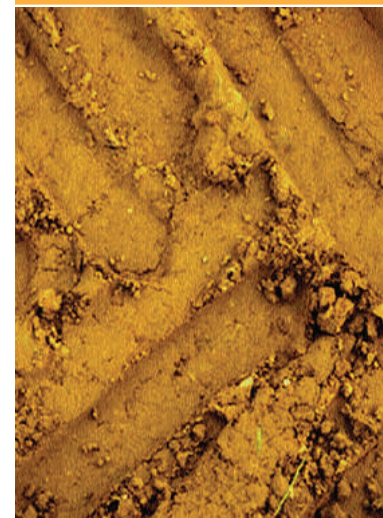

# S270V-1

## SKID STEER LOADER

### Specifications

<b>ENGINE</b>	Make	Yanmar
	Model	4TNV98CT - NMS Final Tier 4
	Net Power	70.7 hp (52.7 kW)
	Rated Engine Speed	2500 rpm
	Displacement	203 cu.in. (3.3 L)
<b>CAPACITIES/ WEIGHT</b>	Rated Operating Capacity	2700 lbs (1225 kg)
	Tipping Load	5400 lbs (2449 kg)
	Fuel Tank	19 gal (75.7 L)
	Travel Speed - Max. with 2-speed option	11.9 mph (19.2 km/hr)
	Operating Weight - Approximate	8150 lbs. (3697 kg)
<b>DIMENSIONS</b>	Overall Operating Height - Fully Raised	167.4" (4252 mm)
	Height to Hinge Pin - Fully Raised	130.3" (3310 mm)
	Overall Height to top of ROPS	81" (2057 mm)
	Ground Clearance to Chassis	8" (203 mm)
	Overall Length w/Bucket	148" (3759 mm)
	Overall Length w/o Bucket	116.5" (2959 mm)
	Wheelbase	49.5" (1257 mm)
	Dump Reach at Full Height	32" (813 mm)
	Rollback at Ground Level	29°
	Dump Angle	42°
	Overall Width	69.5" (1765 mm)
	Bucket Width	70" (1778 mm)
	Clearance Radius - Rear	65.5" (1664 mm)
	Clearance Radius - Front w/o Bucket	56" (1422 mm)
	Clearance Radius - Front w/Bucket	90" (2286 mm)
	Seat to Ground Height	40" (1016 mm)
	Rollback at Full Height	94°
	Dump Height	100" (2540 mm)
	Departure Angle	25°
Standard Tire Size	12.00 x 16.5 HD	
<b>HYDRAULICS</b>	Auxiliary Hydraulics - Standard	23.5 gpm (89 L/min)
	High-Flow Hydraulics - Optional	35 gpm (132 L/min)
	System Relief Pressure (bar)	3200 psi (220.6)
	Reservoir Capacity	10.5 gal. (40 L)
<b>ELECTRICAL</b>	Battery	12-volt (950 CCA)
	Starter	12-volt (3.0 kW)
	Alternator	90-amp

Please note that the standard equipment may vary from this list. Consult your Yanmar dealer for confirmation.