




YANMAR CO., LTD.
YANMAR AMERICA CORP.

Item	Lev.	O	Part No.	Description	Quantity	Remarks
1	-		129989-08250	Leg, Front	2	
2	-	X	129689-44310	Washer, Plain 10mm, (ANSI B18.22.1)	8	(A)
3	-	X	129689-44320	Washer, Lock 10mm, (BS 4464) (Helical spring)	8	(A)
4	-		129689-44330	Bolt, M10 X 1.50 - 25 (Flange hex head)	8	

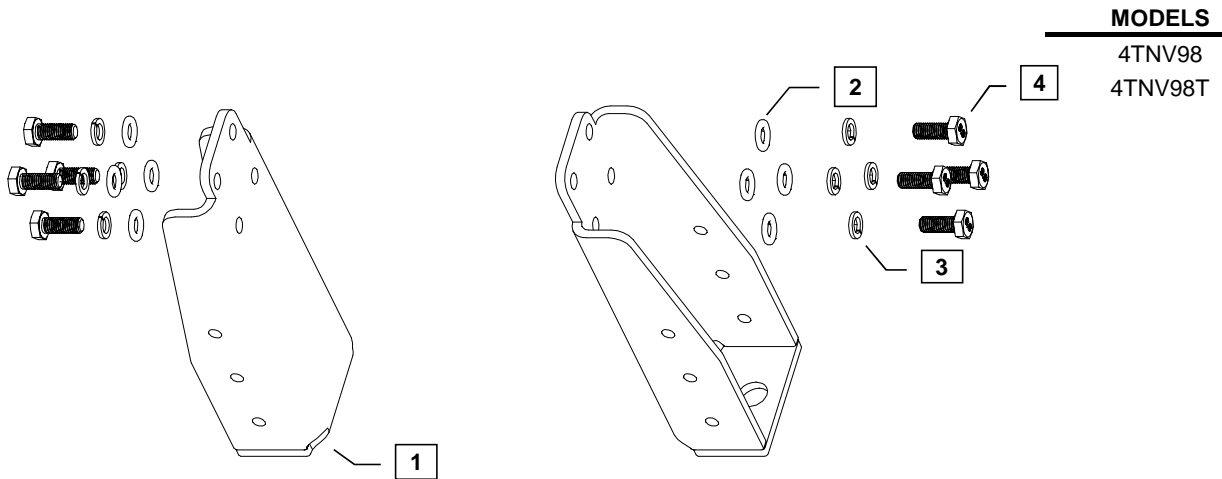

Remarks: (A) 26106-100202 is a service part used to replace the bolt, lock washer and washer assembly (items: 2, 3 and 4).



Installation Instructions

Hand tighten all bolts and nuts until assembly is completed, then torque according to specifications in Table 1. The numbers in () represent the item numbers.

1. Install Front Legs (1) to engine mounting pads using Washer (2), Lock Washer (3) and M10 X 1.5 - 25mm bolts (4) provided in kit. Bolts used to mount shipped engines are the same size but not long enough and should not be used.

NOTE: Comply with torque standards in the table to avoid unexpected damage during installation or in the future.

TABLE 1:

Diameter x Pitch	Kgf-m	Foot-lbf	N-m
M10 x 1.50	4.5 ~ 5.5	32.5 ~ 39.8	44.0 ~ 54.0